




## Grip Solo surface mounted



Material	Aluminum
lightsource	COB LED
Led type	Bridgelux Vesta of Bridgelux V SERIES
Color temperature	Dim to Warm, 2700K,3000K,4000K
CRI	>90
placement	Ceiling/ wall
Light direction	Down/adjustable
Optics	1x lens
Indoor/outdoor	indoor
Beam angle	measured: 17° tot 62° adjustable through knop on rear
Adjustability	360 degrees
Driver	Included, 350mA phase cut dimmable (placed in mount)
Ingangsspanning	See chart with different led types
Power consumed	14,5W
Colors	Black, Brass, Gold
Dimensions	130x68mm
IP class	IP20
Beam	Soft beam through diffuser, taking out the diffuser will give a sharp beam.

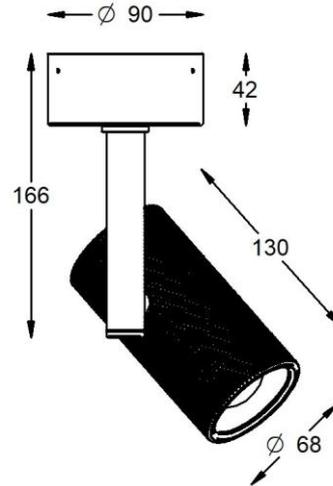

## Grip Solo surface mounted

---

### 2700K Ra 90

Driver output (mA)	350	500
Forward voltage	31	31,9
Lumen output	1380	1911
Efficiency lm/W	142	134
Watt (led)	10,9	16

### 3000K Ra 90

Driver output (mA)	350	500
Forward voltage	31	31.9
Lumen output	1448	2005
Efficiency lm/W	149	141
Watt (led)	10,9	16

### 4000K Ra 90

Driver output (mA)	350	500
Forward voltage	31	31.9
Lumen output	1464	2026
Efficiency lm/W	150	142
Watt (led)	10,9	16

### Dim to warm

Driver output (mA)	350	
Forward voltage	33,8	
Lumen output	1313	
Efficiency lm/W	111	
Watt (led)	11,8	



## Grip Solo surface mounted

---

Description	Item code
Grip Solo surface mounted black 2700K	A-1202-10B-L2B
Grip Solo surface mounted black 3000K	A-1202-10B-L3B
Grip Solo surface mounted black 4000K	A-1202-10B-L4B
Grip Solo surface mounted black dim to warm	A-1202-10B-L5B
Grip Solo surface mounted Brass-plated 2700K	A-1202-10D-L2B
Grip Solo surface mounted Brass-plated 3000K	A-1202-10D-L3B
Grip Solo surface mounted Brass-plated 4000K	A-1202-10D-L4B
Grip Solo surface mounted Brass-plated dim to warm	A-1202-10D-L5B